



## RHINO HOIST -TECLES ELÉCTRICOS DE CADENA CON TROLLEY ELECTRICO


### Especificaciones Técnicas 0.5 - 5.0 ton

Model	SSDHL									
	0.5-01S	01-01S	1.5-01S	02-01S	02-02S	2.5-01S	03-01S	03-02S	03-03S	05-02S
Capacity(t)	0.5t	1t	1.5t	2t		2.5t	3t			5t
Lifting speed (m/min)	7.2	6.6	8.8	6.6	3.3	5.4	5.4	4.4	2.2	2.7
Motor power (Kw)	0.8	1.5	3	3	1.5	3	3	3	1.5	3
Rotation speed (r/min)	1440									
Insulation grade	F									
Power supply	3P 220V-380V/220v-440v 60Hz									
Control voltage	24V / 36V / 48V									
No,of chain	1	1	1	1	2	1	1	2	3	2
Spec.of load chain	Φ6.3	Φ7.1	Φ10.0	Φ10.0	Φ7.1	Φ11.2	Φ11.2	10	Φ7.1	Φ11.2
Net weight (kg)	47	61	108	115	73	115	122	131	85	151



### Especificaciones Técnicas 10 ton.

Model	SSDHL	
	10-04S	10-04D
Capacity(t)	10t	
Lifting Speed(m/min)	2.7	2.7/0.9
Motor Power(kw)	3.0x2	3.0x2/1.0x2
Rotations Speed(r/min)	1440	2880/960
Insulation Grade	F	
Power Supply	3P 220V 690V	
Control Voltage	24V/36V/48V	
No.of Chain	4	4
Spec.of Load Chain	Φ11.2	
Net Weight(kg)	300	380

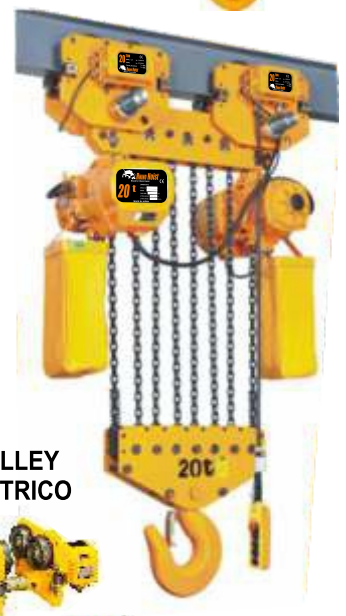

TROLLEY ELECTRICO

### Especificaciones Técnicas 15 - 20 ton. De uno y dos velocidades

Model	Capacity	Lifting speed (m/min)	Motor power (kw)	Rotation speed (r/min)	Insulation grade	Power supply	Control voltage	No.of chain	Spec. of load chain	Net weight (kg)
15-06S	15t	1.8	3.0x2	1440	F grade	3 phase, 200V-690V, 50/60Hz	24V/36V/48V	6	Φ11.2	382
15-06D	15t	1.8/0.6	3.0x2/1.0x2	2880/960	F grade	3 phase, 200V-690V, 50/60Hz	24V/36V/48V	6	Φ11.2	455
20-08S	20t	1.4	3.0x2	1440	F grade	3 phase, 200V-690V, 50/60Hz	24V/36V/48V	8	Φ11.2	482
20-08D	20t	1.5/0.5	3.0x2/1.0x2	2880/960	F grade	3 phase, 200V-690V, 50/60Hz	24V/36V/48V	8	Φ11.2	545

